




HIGH PERFORMANCE ROOFING UNDERLAYMENT



LIGHTWEIGHT

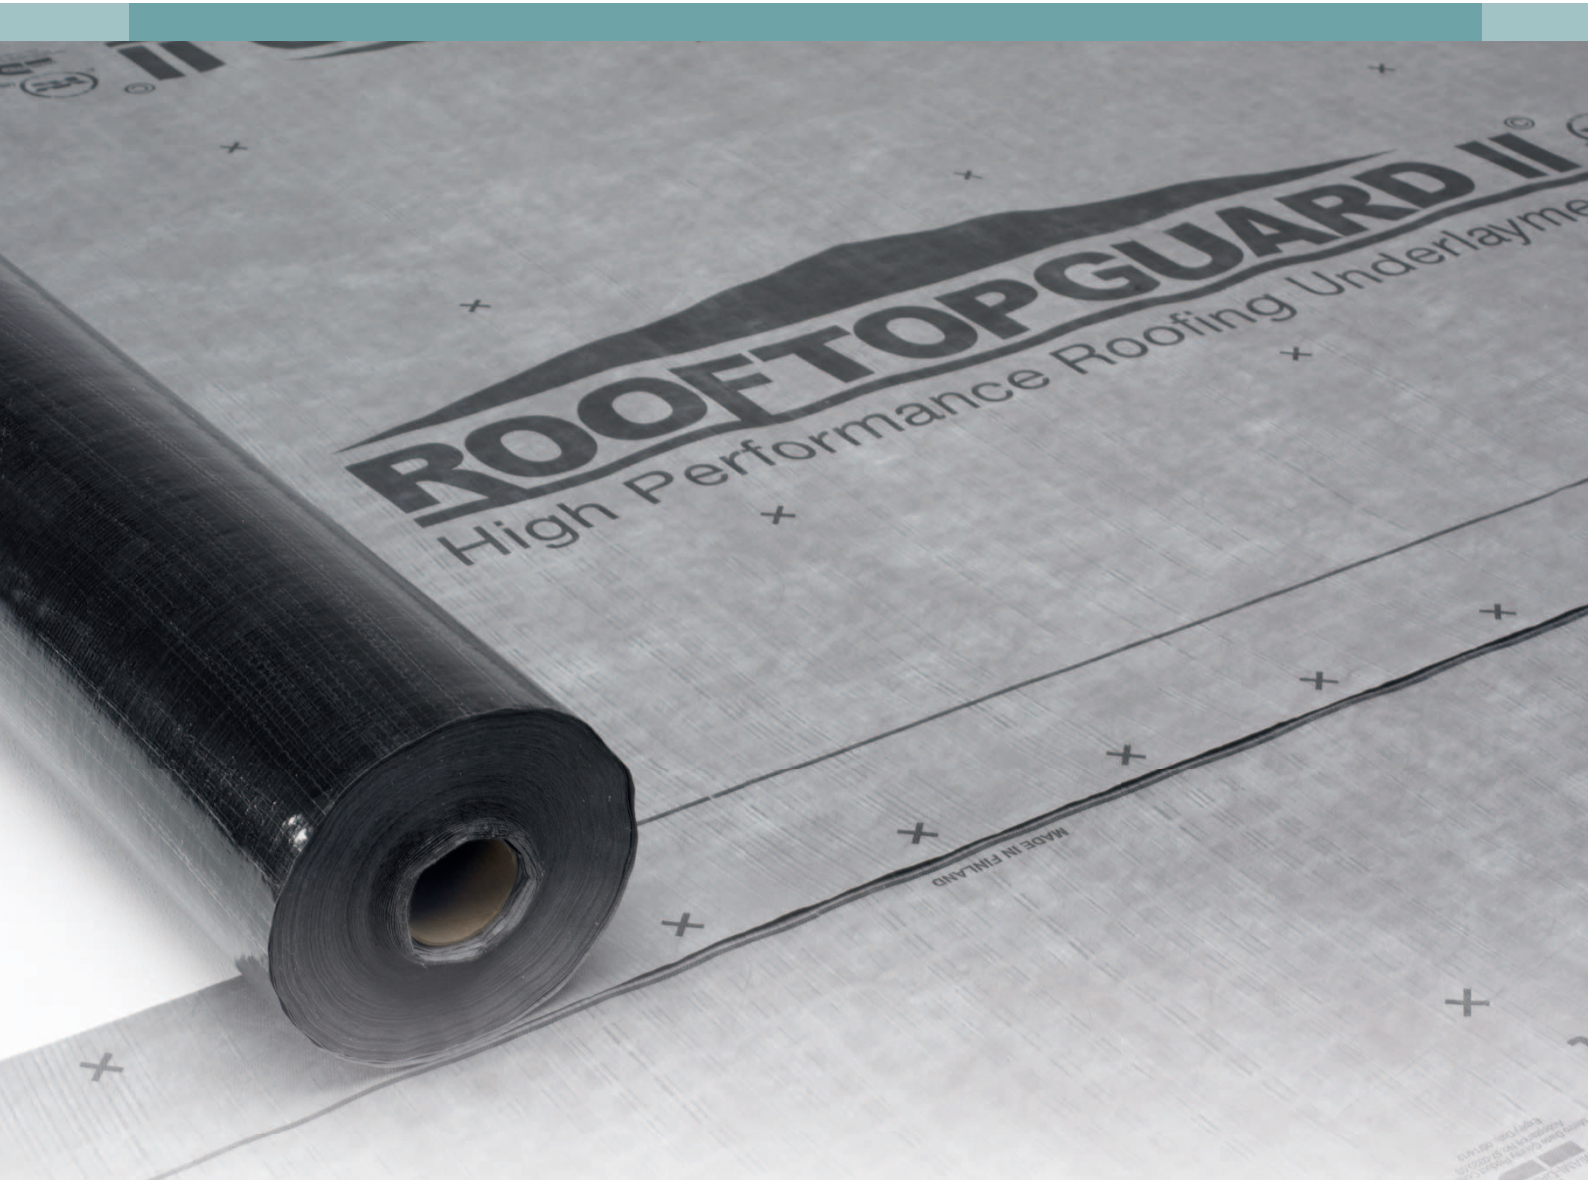

HIGH GRIP
NO SLIP



WEATHER
RESISTANT



EASY
INSTALLATION



6 months

UNCOVERED
EXPOSURE



25
YEAR
LIMITED
WARRANTY



SAVE
TIME & MONEY



HIGH PERFORMANCE ROOFING UNDERLAYMENT I



ROOFTOPGUARD II® OUTPERFORMS THE COMPETITION

- 5-layer polypropylene/polyethylene construction
- Guaranteed waterproof
- Can be installed 30% faster than the competition's equivalent underlayment
- Hurricane-proof: will not tear or rip in high winds
- 100% resistant to insects, vermin, mold, rot and the elements
- Lightweight
- Suitable for use under **all** roofing materials
- Can be left exposed to the elements for up to 6 months without degradation
- Exclusive FIBER-GRIP® slip-resistant surface
- 25-year guarantee



ROOFTOPGUARD II®: THE LATEST TECHNOLOGY FOR A HIGH PERFORMANCE ROOFING UNDERLAYMENT



Easy Installation

Can be installed 30% faster than the competition's equivalent underlayment.



High-Tech Protection – Hurricane-Proof

Guaranteed waterproof and 100% resistant to insects, vermin, mold, rot and the elements.



Save Time and Money

Its 5-layer polypropylene/polyethylene construction results in high strength, while maintaining low weight (under 43 pounds per roll). This makes it suitable for use under **all** roofing materials. Its 60" width and 10 square roll size speed up installation and minimize seams. This makes installation safer, faster and easier.



LIGHTWEIGHT

SAFER, STRONGER SIMPLY SUPERIOR



Uncovered Exposure

Can be left uncovered and exposed to the elements for up to 6 months without degradation.



Superior Grip

RoofTopGuard II®'s exclusive "FIBER-GRIP®" surface is slip resistant and offers superior grip. Independent laboratory tests have shown that RoofTopGuard II® offers greater traction and slip resistance than standard roofing felts.



Unequaled Product Performance

RoofTopGuard II® meets or exceeds all national building code requirements (including those in Miami Dade County) and consistently outperforms conventional underlayments. When it comes to product testing, our tests speak for themselves: strength, elongation, UV resistance, watertightness and water-vapor transmission.

You will find instructions for installing RoofTopGuard II® at www.rooftopguard.com



NATIONAL ROOFING
CONTRACTORS ASSOCIATION
MEMBER



CERTIFICATIONS / APPROVALS

ICBO ITS Report #484-1932, #484-2143
Miami-Dade County Acceptance No. 07-0320.03
ICC-ES ICC-ER6143
Florida Building Code FL1258

SPECIFICATIONS

Roll size 60" x 200"
Roll weight 43 lbs
Coverage 9 1/3 squares
Thickness 12 MIL
Rolls per pallet 33
Pallet weight 1550 lbs
Colors Gray

RKW Us, Inc

3 Central Plaza/Box 347
501 Broad Street/Suite 317
Rome/Georgia 30161 | USA
Phone 706-232-3027
Fax 706-232-3084
Free call (877) 717-5987
from the US and Canada

www.rooftopguard.com
www.rkw-group.com

Manufacturer:

Rosenlew RKW Finland Ltd.
P.O. Box 22, Ulasoorintie 185
28601 Pori | FINLAND
Phone +35 82-517-8899
Fax +35 82-517-8890

www.rosenlewrkw.com

DEALER/DISTRIBUTOR